

Clamps

Dairy - 13WGC




| Tube OD | Service Pressure PSI Rating @ 70°F (21°C) ¹ | Service Pressure PSI Rating @ 250°F (121°C) ¹ | Dimension A | 304 Stainless Steel Part # |
|----------|--|--|-------------|----------------------------|
| 1" - 1½" | 100 | 75 | 2.08" | 13WGC100-150 |
| 2" | 100 | 75 | 2.61" | 13WGC200 |
| 2½" | 100 | 75 | 3.14" | 13WGC250 |
| 3" | 100 | 75 | 3.67" | 13WGC300 |
| 4" | 100 | 75 | 4.78" | 13WGC400 |

¹ finger tight

Accessories

Spring Loaded Nut - 13SLN

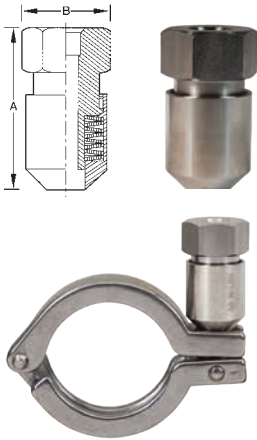

Features:

- Lines using PTFE gaskets that are subject to large temperature swings can benefit from this special product. As the PTFE is compressed through the cycling of the lines, the spring loaded will help keep the connection from leaking.
- If the lines suffer from vibration and bolted clamps are not an option, refitting single pin clamps with this nut will keep the connections from leaking for a longer time than the standard wing nuts.
- If you transport material in tanks via truck, the vibrations can loosen the standard single pin clamps - spring loaded nuts can add a level of insurance to the shipment.
- note: can be used on all wing nut style clamps.
- torque to 50 in. lb.

| Thread | Dimension A | Dimension B | 304 Stainless Steel Part # |
|------------|-------------|-------------|----------------------------|
| 5/16" - 18 | 1.73" | .875" | 13SLN |

Nuts and Bolts



| Description | Part Number |
|---|-------------|
| cross hole wing nut 5/16"-18 | 13WNX |
| mini cross hole wing nut 5/16"-18 for ½" - ¾" clamps | 13WNXM |
| serrated wing nut 5/16"-18 | 13WNS |
| hex wing nut 5/16"-18 | 13WNH |
| bronze hex nut ¾"-16 for bolted clamps | 13BN |
| brass 3/8-16 nuts used on ½" - ¾" and 10" & 12" bolted clamps | 13BNH |
| stainless steel hex nut for bolted clamps | 13SN |
| ¾" 304 stainless steel lock washer | 13LW |
| bolt ¾"-16 x 2¼" for ½" - 1½" bolted clamps | 13CB-2.25 |
| bolt ¾"-16 x 2¾" for 2" and 2½" bolted clamps | 13CB-2.75 |
| bolt ¾"-16 x 3¼" for 3" - 12" bolted clamps | 13CB-3.25 |
| rivet pin for ½" - 5" single pin clamps 5/16" x 1" | 13RP |
| rivet pin for 6" and 8" single pin clamps 5/16" x 1½" | 13RP6 |
| 5/16"-18 x 2" threaded eye bolt for ½" - 5" clamps | 13IB |
| 5/16"-18 x 2½" threaded eye bolt for 6" - 12" clamps | 13IB6 |